




Assembly

	
Fixing the framed panel with End Clamp	Fixing the framed panel with Inter Clamp

Component

	
End Clamp Part No.: ER-EC-ST25/BA (barcode: 10-006-02383) Part No.: ER-EC-ST25/L50/BA (barcode: 10-006-02384)	Inter Clamp Part No.: ER-IC-ST25/BA (barcode: 10-006-02379) Part No.: ER-IC-ST25/L50/BA (barcode: 10-006-02381)

Technical Specification

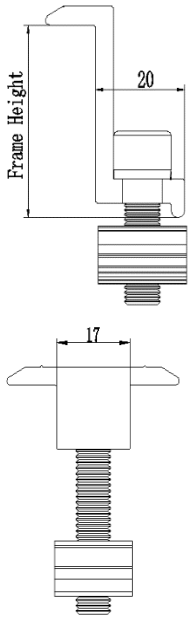Application	ER-EC-ST25 is for framed PV Modules of 25-27mm in height (with Pro-rail) ER-IC-ST25 is for framed PV Modules of 24-26mm (with Pro-rail)	
Requirement	ER-EC-ST needs 20mm space on each side of the Rail ER-IC-ST needs 18mm space between PV Modules	
Recommended Torque	16-20N·m	
Weight	ER-EC-ST25/BA: 0.045 Kg ER-EC-ST25/L50/BA: 0.049 Kg ER-IC-ST25/BA: 0.071 Kg ER-IC-ST25/L50/BA: 0.082 Kg	
Packaging	ER-EC-ST25/BA: 120 units per pack, 4 packs (480 units) per carton ER-IC-ST25/BA: 102 units per pack, 4 packs (408 units) per carton ER-EC-ST25/L50/BA: 98 units per pack, 4 packs (392 units) per carton ER-IC-ST25/L50/BA: 87 units per pack, 4 packs (348 units) per carton	
Material	Main Structure: AL6005-T5 Fasteners: SUS 304	
Color	Black (anodized, no less than 10 µm)	
Standard	BS EN1991-1, BS EN1991-3 and BS EN1991-4	